


## Installation Requirements

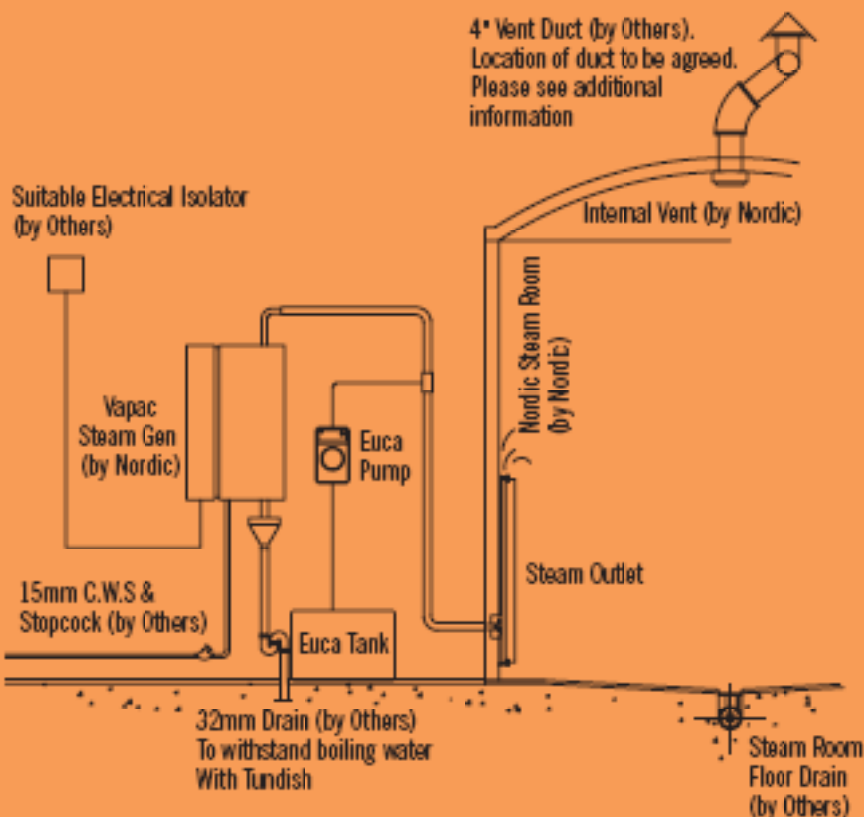

Nordic will provide full and detailed layout and service drawings at proposal stages to ensure that all preparation requirements are provided.

### Floor

tilled with a central floor drain, the flooring must be laid level under the seating sections, falling to the floor drain in the walking area

### Ventilation

a 100mm fresh air duct is required from the roof of the cabin to outside air

### Water supply

15mm cold supply, between 1 and 5 bar, terminated with a stopcock

### Electrical supply

a suitably rated electrical isolator adjacent to the steam generator

### Drainage

32mm drain, suitable for boiling water, to be provided below the steam generator.